

EX30
Multimedia Projector

Key Dates

Launch Kit	September 5, 2008
Announce	September 29, 2008
Product Ship	September 19, 2008
Ad Embargo	October 12, 2008




Proven performance. Smart choice.

- **Rich, full-time color** — advanced 3LCD, 3-chip optical engine
- **HD-compatible** — native SVGA resolution, up to 1400 x 1050
- **Super bright and colorful** — 2200 lumens color, 2200 lumens white light
- **Easy picture adjustment** — ultra flexible keystone correction and digital zoom
- **Plug 'n Project™ setup** — no hassle, one-step connect and project with USB
- **Quick, convenient control** — Sleep Mode, Instant Off®/On, Direct Power On/Off
- **Flexibility without added costs** — included carrying case and component video adapter
- **Ultra long life** — up to 4000-hour lamp life, low power consumption

Product Name	Product Code	UPC
EX30 projector (U.S.)	V11H283020	0 10343 86966 0
EX30 projector (Canada)	V11H283020-F	0 10343 87140 3
Replacement lamp	V13H010L41	0 10343 86410 8
Replacement air filter	V13H134A13	0 10343 86412 2

EX30

Multimedia Projector

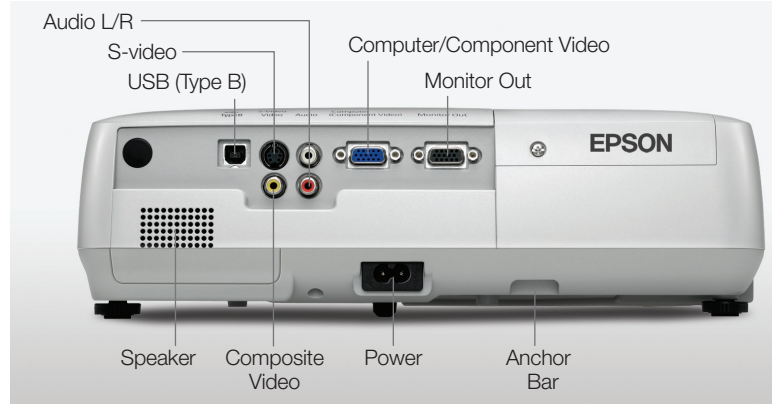

SPECIFICATIONS

Projection System

Epson 3LCD, 3-chip technology

Projection Method

Front/rear/ceiling mount

Driving Method

Epson Poly-silicon TFT Active Matrix

Pixel Number

480,000 dots (800 x 600) x 3

White Light Output**

Up to 2200 lumens (ISO 21118 Standard)

Color Light Output**

Up to 2200 lumens

Aspect Ratio

4:3

Native Resolution

800 x 600 (SVGA)

Resize

640 x 480 (VGA), 1024 x 768 (XGA),
1152 x 864 (SXGA), 1280 x 800 (WXGA),
1440 x 900 (WSXGA), 1400 x 1050 (SXGA+)

Lamp Type

170 W UHE

Lamp Life*

Up to 4000 hours (Low Light Output Mode)
Up to 3000 hours (High Light Output Mode)

Throw Ratio Range

1.5 – 2.0

Size (projected distance)

30" – 350" (0.87 – 10.5 m)

Keystone Correction Manual

Vertical: ± 30 degrees

Contrast Ratio

Up to 2000:1

Color Reproduction

16.77 million colors

PROJECTION LENS

Type

Digital zoom/Manual focus

F-number

1.44

Focal Length

16.6 mm

Zoom Ratio

Digital zoom 1.0 – 1.35

OTHER

Display Performance

NTSC: 560 lines

PAL: 560 line

(Depends on observation of the multi-burst pattern)

Input Signal

NTSC/NTSC4.43/PAL/M-PAL/N-PAL/
PAL60/SECAM

Interfaces

Computer/component video:

D-sub 15 pin x 1

S-video: Mini DIN x 1

Composite video: RCA (Yellow) x 1

Audio in: RCA x 1 (White/Red)

USB connector: Type B x 1

Monitor out: D-sub 15 pin x 1

Speaker

1 W (Mono)

Operating Temperature

41 ° to 95 °F (5 ° to 35 °C)

Power Supply Voltage

100 – 240 V ±10%, 50/60 Hz

Power Consumption

246 W, 3 W standby

Fan Noise

35 dB (High Light Output Mode)

28 dB (Low Light Output Mode)

Security

Kensington®-style lock provision,
Password protect function

DIMENSIONS (W X D X H)

Including feet: 12.9" x 9.6" x 4.0"

Excluding feet: 12.9" x 9.6" x 3.6"

Weight: 6.0 lb/2.7 kg

REMOTE CONTROL

Features

Source search selection, power, volume,
e-zoom, A/V mute, freeze, menu, page up
and down, help, auto, mouse functions,

Operating Angle

Right/left: ± 30 degrees

Upper/lower: ± 15 degrees

Operating Distance

19' (6 m)

SUPPORT — THE EPSON CONNECTIONSM

Pre-sales support

U.S. and Canada

800-463-7766

Internet website

www.epson.com

Service Programs

Two-year projector limited warranty, Epson
Road Service program, Epson PrivateLine®
dedicated toll-free support and 90-day lamp
warranty

Contents

Power cable, computer cable (VGA),
USB cable, component video adapter, soft
carrying case, projector remote control,
batteries, user manual CD, Quick Setup
Sheet, PrivateLine support card, registration
card and password protection sticker

ACCESSORY PART NUMBERS

Universal projector ceiling mount	ELPMBPJF
Component to VGA video cable	ELPKC19
S-video cable	ELPSV01
Swiss Gear® backpack	ELPKS63
Wheeled soft case	ELPKS62
Soft shoulder case for projector and laptop	ELPKS61
Molded hardshell case	ELPKS58
50" portable screen	ELPSC06
60" portable pop-up screen	ELPSC07
80" portable pop-up screen	ELPSC08
Duet™ screen	ELPSC80
Epson DC-10s document camera	ELPDC10S
Kensington security lock	ELPSL01

PACKAGING SPECIFICATIONS

EX30

Dimensions 16.8" x 14.9" x 7.2" (W x D x H)

Weight 11.7 lb

Replacement Lamp

Dimensions 6.3" x 5.5" x 5.6" (W x D x H)

Weight 0.7 lb

Master Carton

Dimensions 28.4" x 13.1" x 6.8" (W x D x H)

Weight 1.1 lb

Units Per Master Carton 10

Replacement Air Filter

Dimensions 3.9" x 1.2" x 4.9" (W x D x H)

Weight 0.88 lb

Master Carton

Dimensions 12.8" x 5.3" x 4.7" (W x D x H)

Weight 1.1 lb

Units Per Master Carton 10

* Lamp life results will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

** Light output varies depending upon modes (color and white light output).

Epson America, Inc.

3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.

3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5